

بِسْمِ اللَّهِ الرَّحْمَنِ الرَّحِيمِ



# پردازش سیگنال دیجیتال

درس ۱۷

# فاز خطی تعمیم یافته

**Generalized Linear Phase**

کاظم فولادی قلعه

دانشکده مهندسی، پردیس فارابی

دانشگاه تهران

<http://courses.fouladi.ir/dsp>

# Generalized Linear Phase

# Linear Phase System

- Ideal Delay System

$$H_{id}(e^{j\omega}) = e^{-j\omega\alpha} \quad |\omega| < \pi$$

- Magnitude, phase, and group delay

$$|H_{id}(e^{j\omega})| = 1$$

$$\angle H_{id}(e^{j\omega}) = -\omega\alpha$$

$$\text{grd}[H_{id}(e^{j\omega})] = \alpha$$

- Impulse response

$$h_{id}[n] = \frac{\sin(\pi(n-\alpha))}{\pi(n-\alpha)}$$

- If  $\alpha = n_d$  is integer

$$h_{id}[n] = \delta[n - n_d]$$

- For integer  $\alpha$  linear phase system delays the input

$$y[n] = x[n] * h_{id}[n] = x[n] * \delta[n - n_d] = x[n - n_d]$$

# Linear Phase Systems

- For **non-integer**  $\alpha$  the output is an **interpolation of samples**
- Easiest way of representing is to think of it in **continuous**

$$h_c(t) = \delta(t - \alpha T) \quad \text{and} \quad H_c(j\Omega) = e^{-j\Omega\alpha T}$$

- This representation can be used even if  $x[n]$  was not originally derived from a continuous-time signal
- The output of the system is

$$y[n] = x(nT - \alpha T)$$

- Samples of a time-shifted, band-limited interpolation of the input sequence  $x[n]$
- A **linear phase system** can be thought as

$$H(e^{j\omega}) = |H(e^{j\omega})| e^{-j\omega\alpha}$$

- A **zero-phase system** output is delayed by  $\alpha$

# Symmetry of Linear Phase Impulse Responses


- Linear-phase systems

$$H(e^{j\omega}) = |H(e^{j\omega})| e^{-j\omega\alpha}$$


- If  $2\alpha$  is integer

- Impulse response symmetric


$$h[2\alpha - n] = h[n]$$

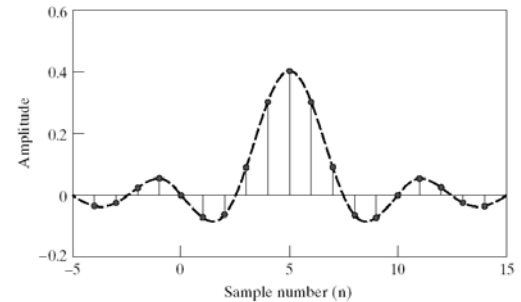

$\alpha=5$

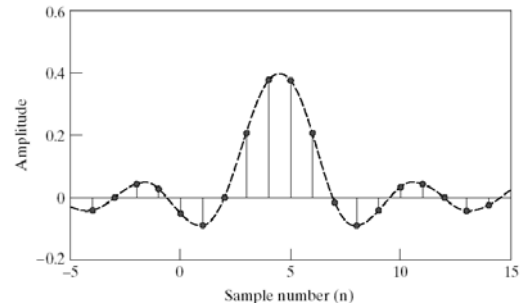

$\alpha=4.5$

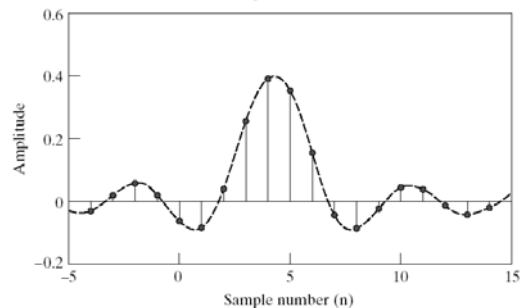

$\alpha=4.3$

# Generalized Linear Phase System

- Generalized Linear Phase

$$H(e^{j\omega}) = A(e^{j\omega})e^{-j\omega\alpha + j\beta}$$

$A(e^{j\omega})$ : Real function of  $\omega$   
 $\alpha$  and  $\beta$  constants

- Additive constant in addition to linear term
- Has constant group delay

$$\tau(\omega) = \text{grad}[H(e^{j\omega})] = -\frac{d}{d\omega}(\arg[H(e^{j\omega})]) = \alpha$$

- And linear phase of general form

$$\arg[H(e^{j\omega})] = \beta - \omega\alpha \quad 0 \leq \omega < \pi$$

## Condition for Generalized Linear Phase

- We can write a generalized linear phase system response as

$$H(e^{j\omega}) = A(e^{j\omega})e^{-j\omega\alpha + j\beta} = A(e^{j\omega})\cos(\beta - \omega\alpha) + jA(e^{j\omega})\sin(\beta - \omega\alpha)$$

$$H(e^{j\omega}) = \sum_{n=-\infty}^{\infty} h[n]e^{-j\omega n} = \sum_{n=-\infty}^{\infty} h[n]\cos(\omega n) - j \sum_{n=-\infty}^{\infty} h[n]\sin(\omega n)$$

- The **phase angle** of this system is

$$\tan(\arg[H(e^{j\omega})]) = \tan(\beta - \omega\alpha) = \frac{\sin(\beta - \omega\alpha)}{\cos(\beta - \omega\alpha)} = \frac{-\sum_{n=-\infty}^{\infty} h[n]\sin(\omega n)}{\sum_{n=-\infty}^{\infty} h[n]\cos(\omega n)}$$

- Cross multiply to get necessary condition for generalized linear phase

$$\sum_{n=-\infty}^{\infty} h[n]\cos(\omega n)\sin(\beta - \omega\alpha) + \sum_{n=-\infty}^{\infty} h[n]\sin(\omega n)\cos(\beta - \omega\alpha) = 0$$

$$\sum_{n=-\infty}^{\infty} h[n][\cos(\omega n)\sin(\beta - \omega\alpha) + \sin(\omega n)\cos(\beta - \omega\alpha)] = 0$$

$$\sum_{n=-\infty}^{\infty} h[n]\sin(\beta - \omega\alpha + \omega n) = \sum_{n=-\infty}^{\infty} h[n]\sin[\beta + \omega(n - \alpha)] = 0$$

# Symmetry of Generalized Linear Phase

- **Necessary condition** for generalized linear phase

$$\forall \omega \quad \sum_{n=-\infty}^{\infty} h[n] \sin[\beta + \omega(n - \alpha)] = 0$$

- For  $\beta = 0$  or  $\pi$

$$\sum_{n=-\infty}^{\infty} h[n] \sin[\omega(n - \alpha)] = 0 \longrightarrow h[2\alpha - n] = h[n]$$

- For  $\beta = \pi/2$  or  $3\pi/2$

$$\sum_{n=-\infty}^{\infty} h[n] \cos[\omega(n - \alpha)] = 0 \longrightarrow h[2\alpha - n] = -h[n]$$



## Causal Generalized Linear-Phase System

- If the system is **causal** and generalized linear-phase

$$h[M-n] = \mp h[n]$$

- Since  $h[n] = 0$  for  $n < 0$  we get

$$h[n] = 0 \quad n < 0 \quad \text{and} \quad n > M$$

An FIR impulse response of length  $M+1$  is **generalized linear phase**  
if  
it is **symmetric**

- Here  $M$  is an **even integer**

# Type I FIR Linear-Phase System

- **Type I** system is defined with symmetric impulse response

$$h[n] = h[M - n] \quad \text{for } 0 \leq n \leq M$$

- $M$  is an **even** integer





- The frequency response can be written as

$$\begin{aligned} H(e^{j\omega}) &= \sum_{n=0}^M h[n] e^{-j\omega n} \\ &= e^{-j\omega M/2} \left[ \sum_{n=0}^{M/2} a[n] \cos(\omega n) \right] \end{aligned}$$

- Where

$$a[0] = h[M/2]$$

$$a[k] = 2h[M/2 - k] \quad \text{for } k = 1, 2, \dots, M/2$$

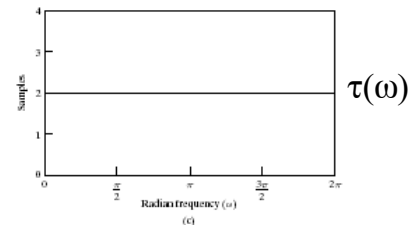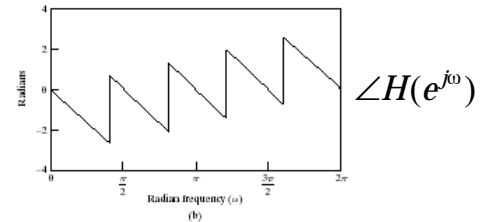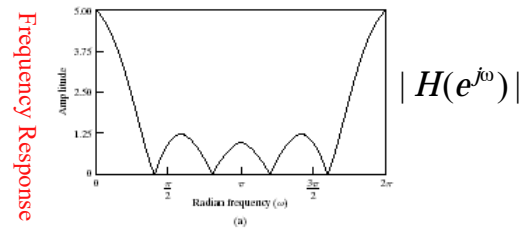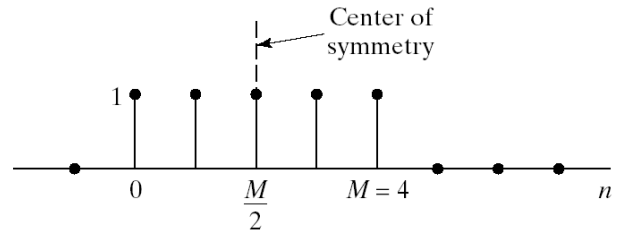

# Type II FIR Linear-Phase System

- **Type II** system is defined with symmetric impulse response

$$h[n] = h[M - n] \quad \text{for } 0 \leq n \leq M$$


- $M$  is an **odd** integer

- The frequency response can be written as

$$\begin{aligned} H(e^{j\omega}) &= \sum_{n=0}^M h[n] e^{-j\omega n} \\ &= e^{-j\omega M/2} \left[ \sum_{n=1}^{(M+1)/2} b[n] \cos\left(\omega\left(n - \frac{1}{2}\right)\right) \right] \end{aligned}$$

- Where

$$\begin{aligned} b[k] &= 2h[(M+1)/2 - k] \\ \text{for } k &= 1, 2, \dots, (M+1)/2 \end{aligned}$$

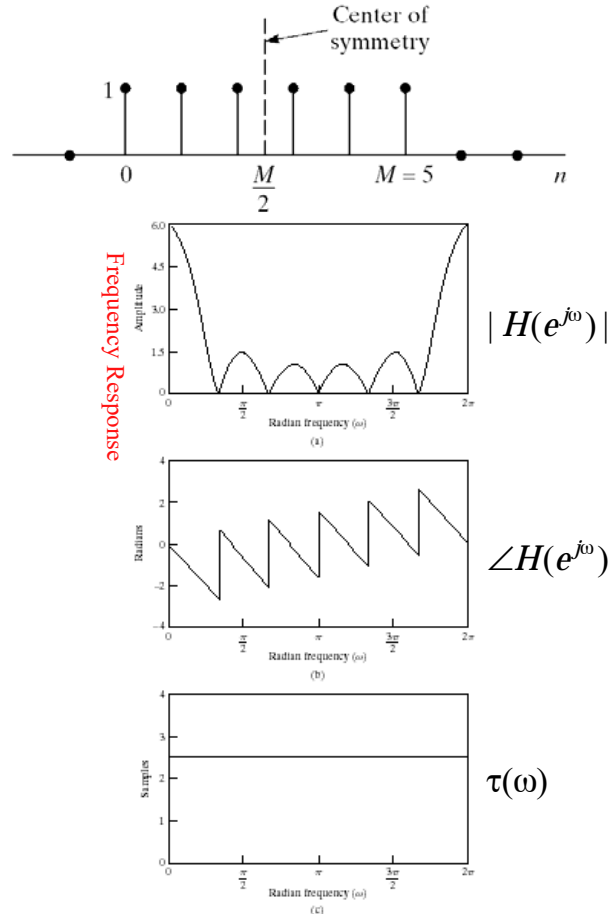

# Type III FIR Linear-Phase System

- **Type III** system is defined with symmetric impulse response

$$h[n] = -h[M - n] \quad \text{for } 0 \leq n \leq M$$





- $M$  is an **even** integer

- The frequency response can be written as

$$\begin{aligned} H(e^{j\omega}) &= \sum_{n=0}^M h[n] e^{-j\omega n} \\ &= j e^{-j\omega M/2} \left[ \sum_{n=1}^{M/2} c[n] \sin(\omega n) \right] \end{aligned}$$

- Where

$$\begin{aligned} c[k] &= 2h[M/2 - k] \\ &\text{for } k = 1, 2, \dots, M/2 \end{aligned}$$

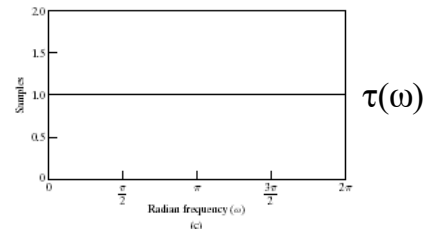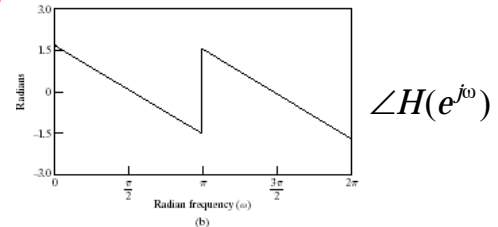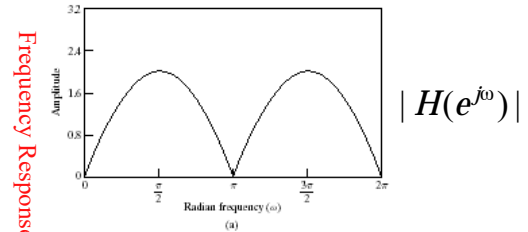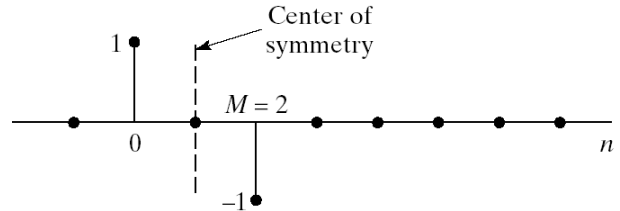

# Type IV FIR Linear-Phase System

- **Type IV** system is defined with symmetric impulse response

$$h[n] = -h[M - n] \quad \text{for } 0 \leq n \leq M$$

- M is an **odd** integer

- The frequency response can be written as





$$H(e^{j\omega}) = \sum_{n=0}^M h[n] e^{-j\omega n}$$

$$= j e^{-j\omega M/2} \left[ \sum_{n=1}^{(M+1)/2} d[n] \sin\left(\omega \left(n - \frac{1}{2}\right)\right) \right]$$

- Where

$$d[k] = 2h[(M+1)/2 - k]$$

for  $k = 1, 2, \dots, (M+1)/2$

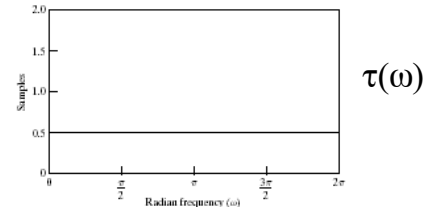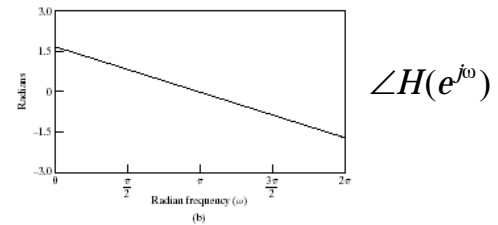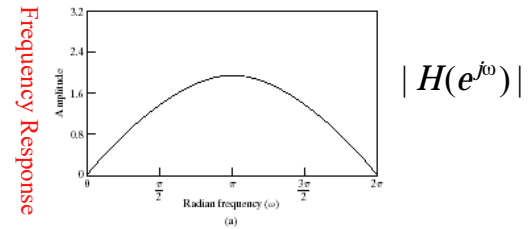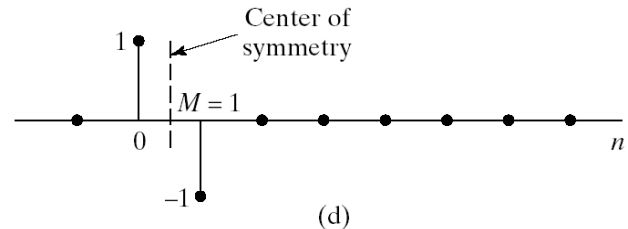

## Location of Zeros for Symmetric Cases

- For type **I** and **II** we have

$$h[n] = h[M-n] \xrightarrow{z} H(z) = z^{-M} H(z^{-1})$$

- So if  $z_0$  is a zero  $1/z_0$  is also a zero of the system
- If  $h[n]$  is **real** and  $z_0$  is a zero  $z_0^*$  is also a zero
- So for **real** and **symmetric**  $h[n]$  zeros come in sets of four
- Special cases where zeros come in pairs
  - If a zero is on the unit circle reciprocal is equal to conjugate
  - If a zero is real conjugate is equal to itself
- Special cases where a zero come by itself
  - If  $z = \pm 1$  both the reciprocal and conjugate is itself
- Particular importance of  $z = -1$

$$H(-1) = (-1)^M H(-1)$$

- If  $M$  is odd implies that

$$H(-1) = 0$$

- Cannot design high-pass filter with symmetric FIR filter and  **$M$  odd**

## Location of Zeros for Antisymmetric Cases

- For type **III** and **IV** we have

$$h[n] = -h[M-n] \xrightarrow{z} H(z) = -z^{-M} H(z^{-1})$$

- All properties of symmetric systems holds
- Particular importance of both  $z = +1$  and  $z = -1$

- If  $z = 1$

$$H(1) = -H(1) \Rightarrow H(1) = 0$$

- Independent from  $M$ : odd or even


- If  $z = -1$

$$H(-1) = (-1)^{M+1} H(-1)$$


- If  $M+1$  is odd implies that

$$H(-1) = 0$$


# Typical Zero Locations

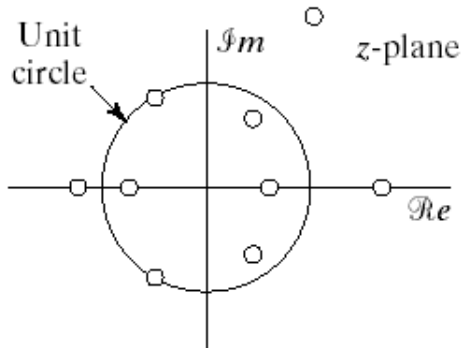


type I

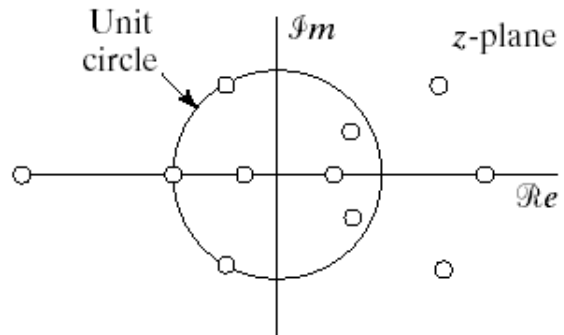

type II

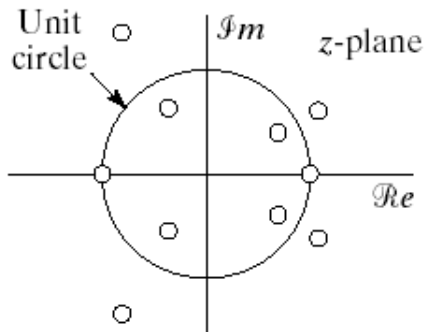

type III

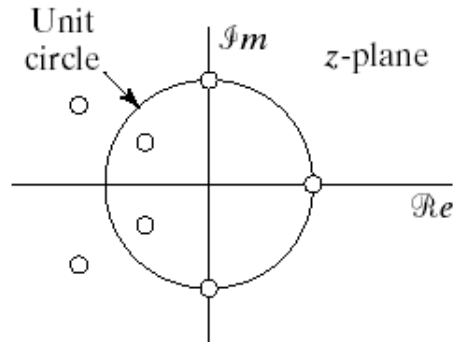

type IV



## Relation of FIR Linear Phase to Minimum-Phase

- In general a **linear-phase FIR** system is not **minimum-phase**
- We can always write a linear-phase FIR system as

$$H(z) = H_{\min}(z)H_{uc}(z)H_{\max}(z)$$

- Where

$$H_{\max}(z) = H_{\min}(z^{-1})z^{-M_i}$$

- And  $M_i$  is the number of zeros
- $H_{\min}(z)$  covers all zeros **inside the unit circle**
- $H_{uc}(z)$  covers all zeros on the **unit circle**
- $H_{\max}(z)$  covers all zeros **outside the unit circle**